


Product Specification Sheet

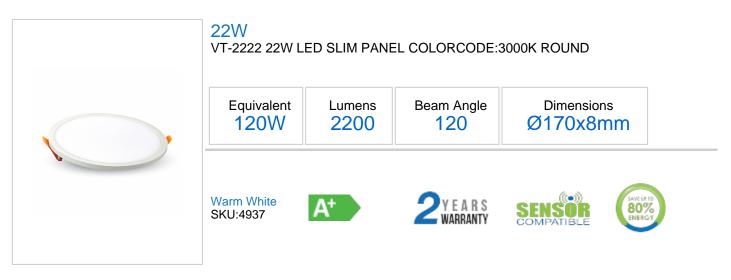

Technical Information

| Instant Start: | 0-100% in lt1s |
|----------------|----------------|
| EQ-WATTS: | 120 |
| Watts: | 22 |
| Lumens: | 2200 |
| Beam Angle: | 120 |
| Cutting Size: | 160mm |
| Unit Color: | White |
| Body Type: | Aluminium |
| Energy Rating: | A+ |
| Long life: | 20,000 Hours |

| LED Chip Type: | SMD |
|------------------------|--------------------|
| IP Rating: | IP20 |
| Dimmable: | No |
| Warranty (Years): | 2 |
| PF: | >0.9 |
| CRI: | >80 |
| Operation Temperature: | -25 to +50°c |
| Input Power: | AC:85-265V,50/60Hz |
| Sensor Compatibility: | Yes |



Features

- Compare with incandescent, it can save over 80% electric cost
- Contemporary & Elegant Design
- Higher Light Transmission Rate
- Easy to install Plug and play version
- Dimmable options available
- High quality power driver ensures reliable lifetime
- Controlled Glare rating values for comfortable commercial applications
- Range of Sizes to suit different workspaces
- Instant Start 0-100% in
- No flickering, No U.V Radiation
- No Lead or Mercury content hence Environment friendly
- Application Office, Conference Room, Showroom, Lobby, Cabin, Kitchen etc



Suitable & Recommended for maximum daily use of 10-12 hours

Packaging

| Unit Details | |
|---------------------------------|----------|
| Length(Box)mm | 220 |
| Width(Box)mm | 35 |
| Height(Box)mm | 175 |
| Unit CBM | 0.001103 |
| Master Box Packaging | |
| Master Box Qty (Pcs Per Carton) | 40 |
| Qty Per Pallet | 960 |

